

Solar

Solar inverters

Unlimited Energy



Energy for
the earth.

We are the
heart of
photovoltaic
plants

“Vertical integration gives us flexibility to adapt to customers’ requirements”

+25 International delegations

+70_{GW}

OF AC INSTALLED POWER

+10_K

SOLAR INVERTERS SOLD

+2000

SOLAR PROJECTS AROUND THE WORLD

HEM

10

HEMK

16

DC/DC

22

MV Skid
& Twin Skid

32

PPC PRO

40

Datasheets

50

Power On
Support

70

Contact

74

HEM

Our turn-key solution simplifies the task of designing the installation, and reduces connection costs.

HEM

Just all-in-one

Easy maintenance. The advantages of a central inverter with the modularity of the string inverters. Designed to be easily replaceable on the field with a safe, reliable, and fast Plug&Play assembly system. Includes 4 FRUs (Field Replaceable Units).

Bus Plus. Combine solar and storage. The Bus Plus feature allows the connection of up to four Freemaq DC/DC converters. It is the most cost-competitive solution for solar-plus-storage retrofits.

ECON MODE. Removes no-load losses. Disconnecting the power station from the grid and taking the medium-voltage transformer out of the circuit, the continuous energy cost of no-load losses is eliminated.

Grid support. Capable of operating on any power system. Offering grid support functionalities to comply with the most restrictive grid codes.

Active heating. The active heating function is included by default and is automatically activated to avoid internal condensation at very low temperatures when the inverter is not actively exporting power. It also can shift to reactive power compensation mode.

Multilevel topology. The 3 level IGBT topology reduces power stage losses, increases inverter efficiency, and minimizes total harmonic distortion. High efficiency to deliver the lowest cost of energy (LCOE).

Integrated MV solution in the same enclosure. The solar turn-key solution that simplifies the installation design.

iCOOL 4, the most innovative cooling system. Our own air ventilation system provides a constant flow of clean air inside the equipment, without the need of liquid cooling.





DC-coupled storage system
from 1200 kW to 4800 kW

Can reach up to a nominal
power of 4.2 MVA

Maximum power up
to 1500 Vdc

HEMK

Offers the advantages of central and string inverters. Full front access simplifies maintenance tasks.

HEMK

High power on a compact unit

Easy maintenance. The advantages of a central inverter with the modularity of the string inverters. Designed to be easily replaceable on the field with a safe, reliable, and fast Plug&Play assembly system. Includes up to 4 FRUs (Field Replaceable Units).

Bus Plus. Combines solar energy and storage. The Bus Plus feature allows the connection of up to four Freemaq DC/DC converters. It's the most cost-competitive solution for solar-plus-storage retrofits.

Active heating. The active heating function is included by default and is automatically activated to avoid internal condensation at very low temperatures when the inverter is not actively exporting power. It also can shift to reactive power compensation mode.

Grid support. Capable of operating on any power system. Offering grid support functionalities to comply with the most restrictive grid codes.

Multilevel topology. The 3 level IGBT topology reduces power stage losses, increases inverter efficiency, and minimizes total harmonic distortion. High efficiency to deliver the lowest cost of energy (LCOE).





DC-coupled storage system
from 1200 kW to 4800 kW

Can reach up to a nominal
power of 4.4 MVA

6 different AC voltages

Maximum power up
to 1500 Vdc

DC/DC

Maximize the benefits of solar+storage plants with our DC/DC converter. Easy to fit in any place and compatible with all battery technologies.

Freemaq DC/DC

Storage for solar plants

Re-designed to maximize the benefits of large-scale solar plants with a solar-plus-storage approach.

Functions: energy shifting, ramp control rate, frequency response, clipping energy recovery.

Its unique modular design provides the flexibility needed to design your project, choosing the amount of storage power to be dispatched, according to the specific grid requirements.





**The most efficient bidirectional
DC/DC converter.**

Modular Outdoor Solution

Nominal power of 1200 kW

Up to 1500 Vdc




Maximize the benefits of solar plants with our Freemaq DC/DC. How?

1 With the DC-coupled energy storage system, the excess energy from the PV plant can be stored in the Battery Energy Storage System (BESS) and then delivered when needed.

2 DC/DC makes it possible to deliver the stored energy in periods of low PV power availability, achieving a greater overall efficiency of the PV plant.

This stored energy can be exported to the utility grid when the price per kWh is higher, optimizing the revenue.

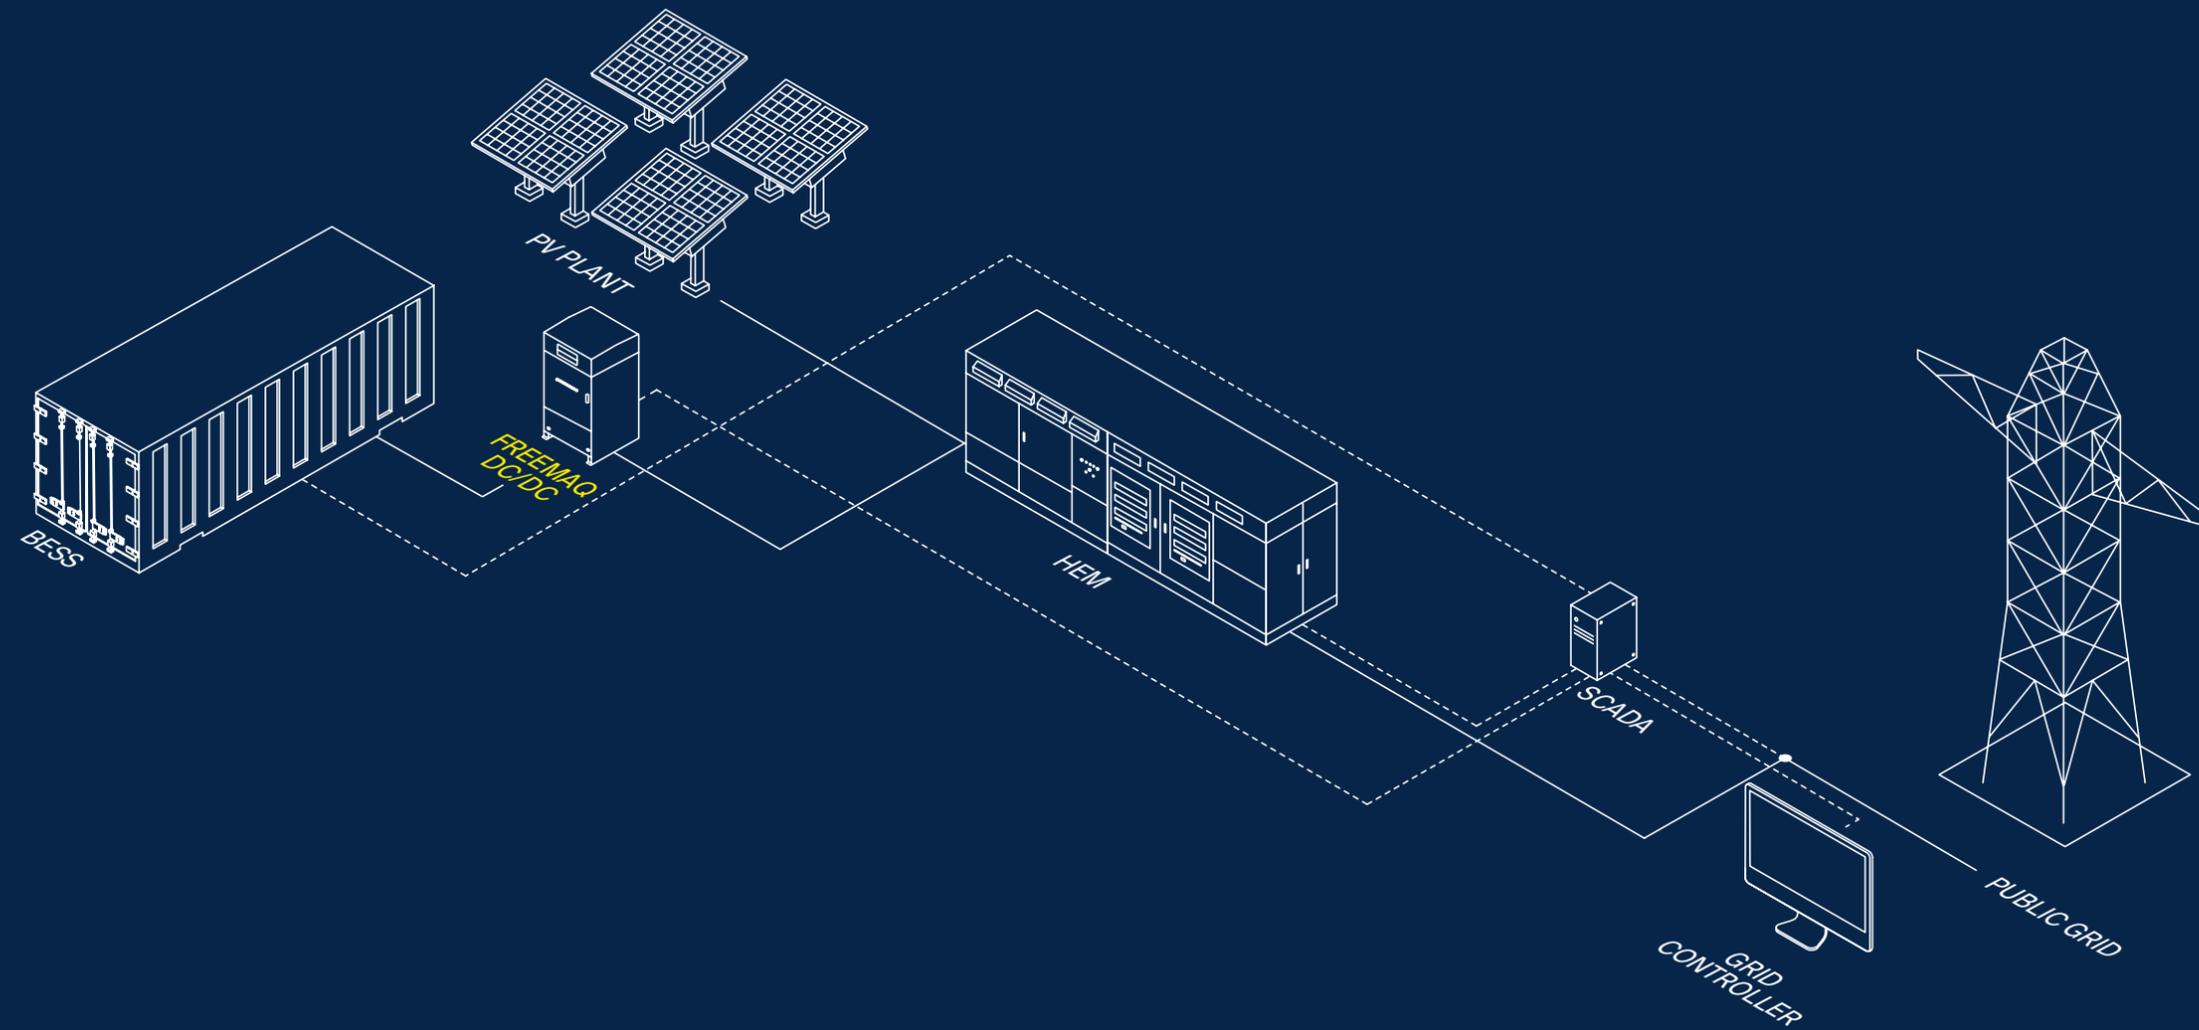

Easy to integrate

MV Skid & Twin Skid

Combine the HEMK with our MV stations. Utility scale solar stations. From low to medium voltage.


MV Skid Compact & Twin Skid Compact

Our MV Stations make the
commissioning easier

Turn-key solution. The SKID family facilitates the project design and reduces the installation costs.


The fastest connection with any HEMK.

Simplify your commissioning. All the medium voltage equipment is already integrated.

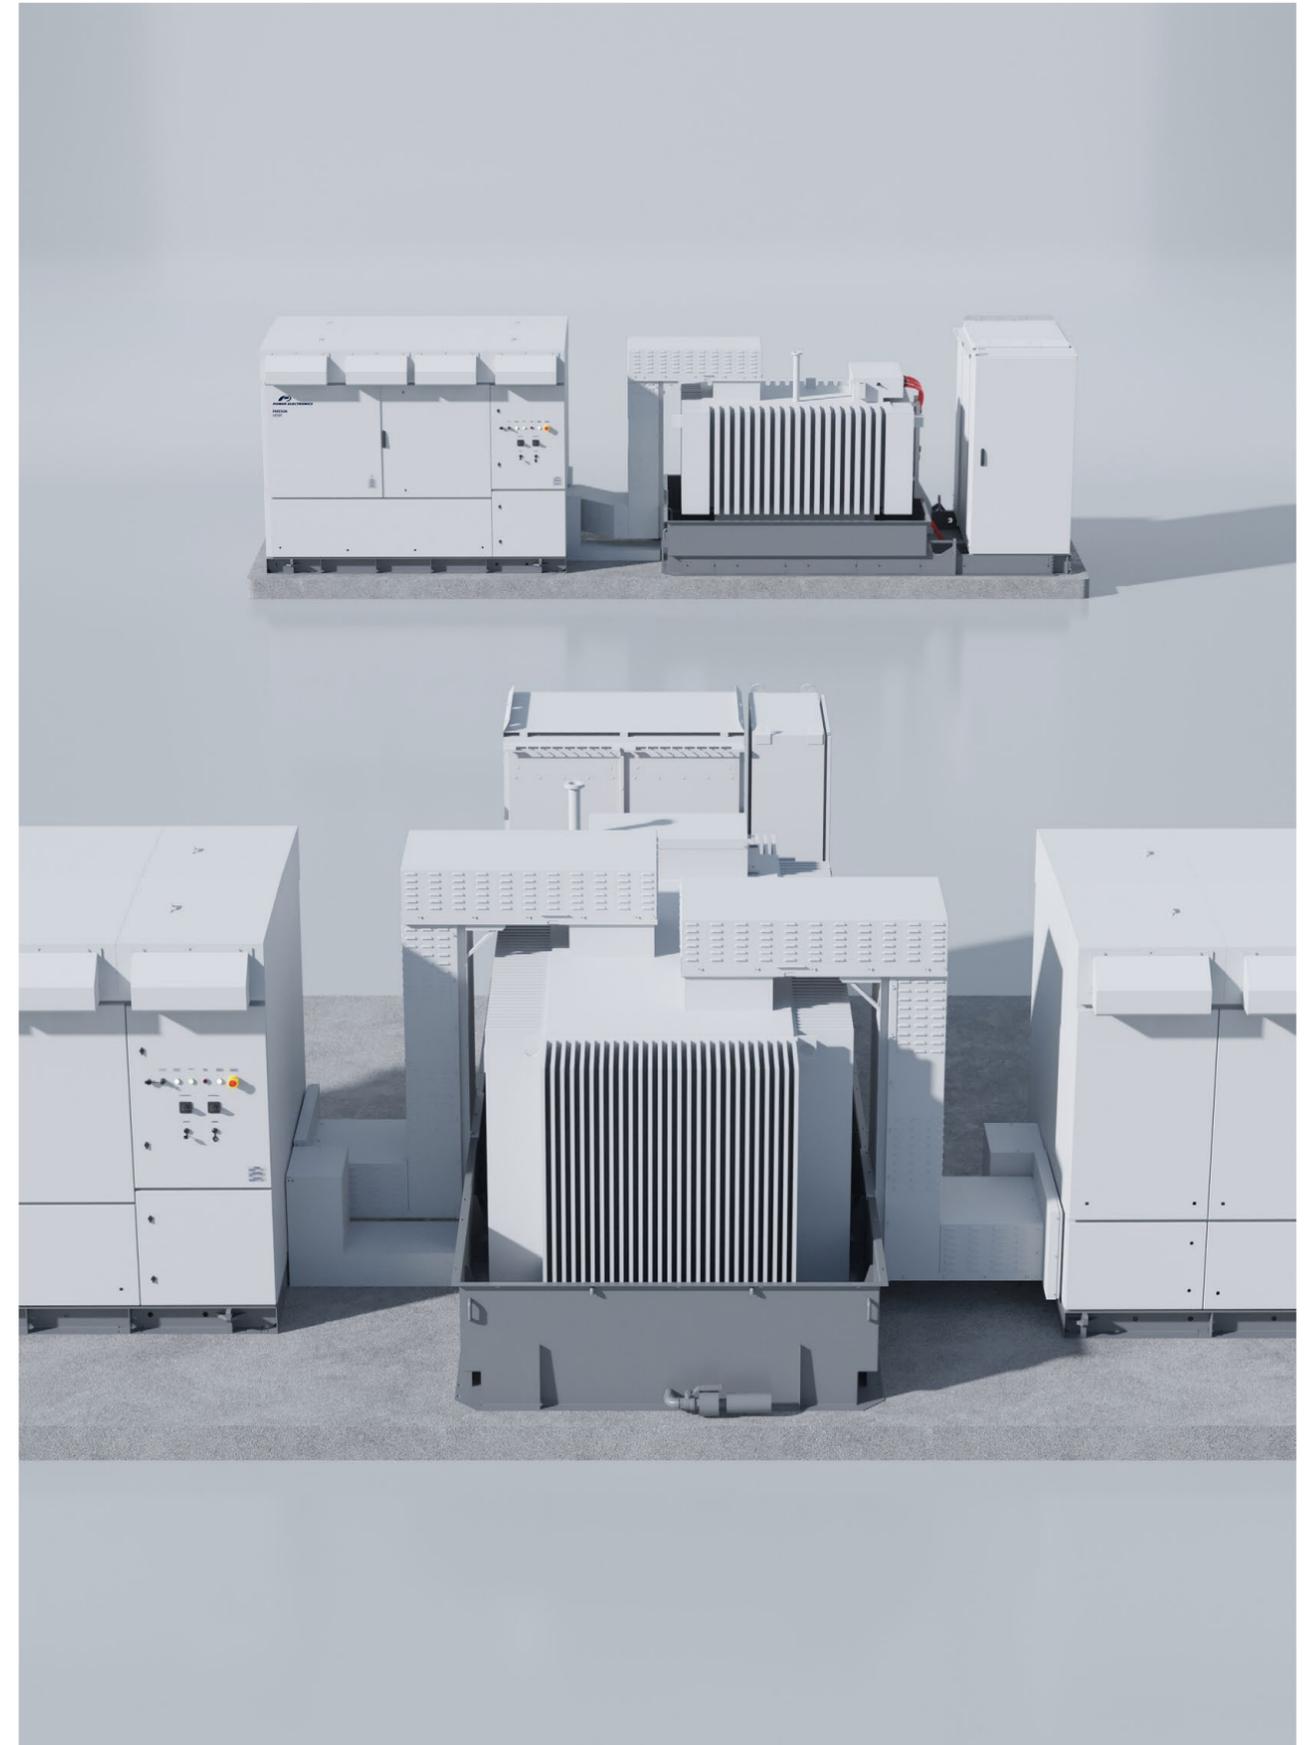

Easy and fast connection

MV Skid Compact

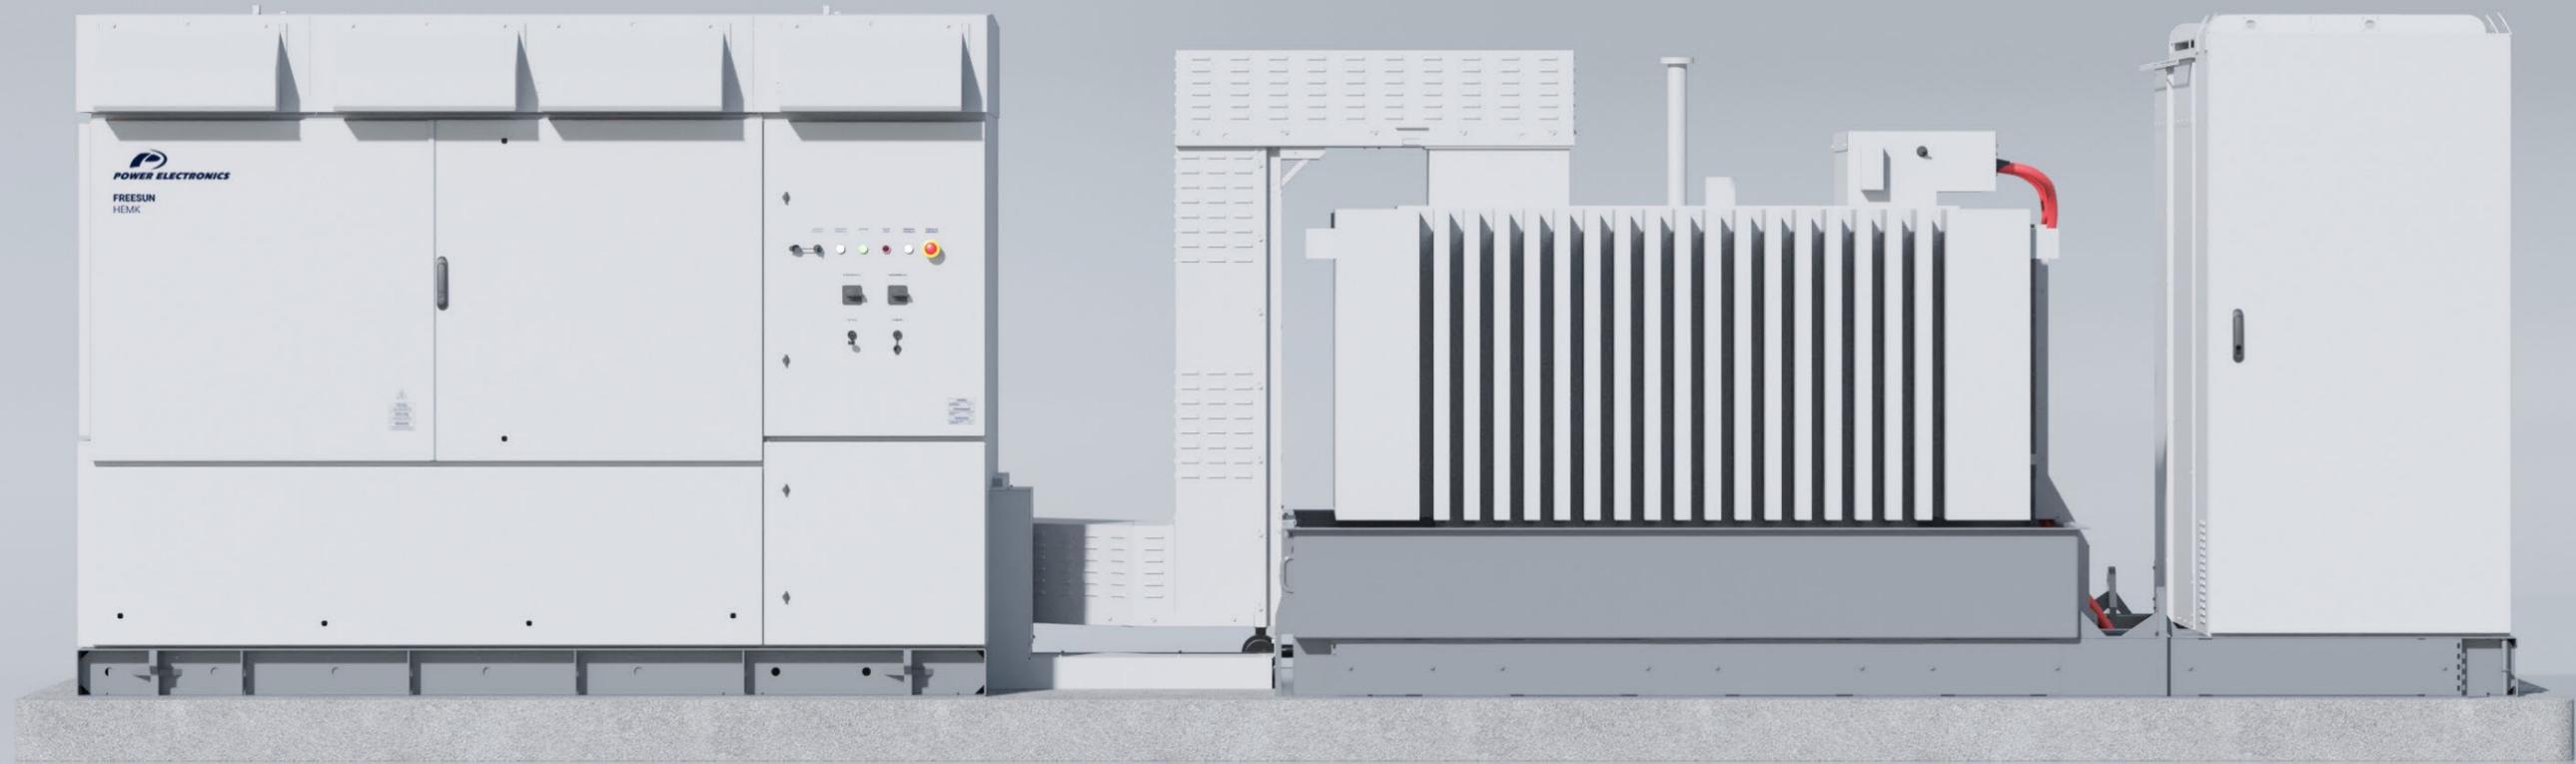

From 6.6 kV to 34.5 kV in the high voltage range


Power outputs from 1910 kVA to 4390 kVA

600 V - 690 V in the low voltage range

Choose the distribution that fits better on your solar plant for one HEMK

For the largest solar plants

Twin Skid Compact

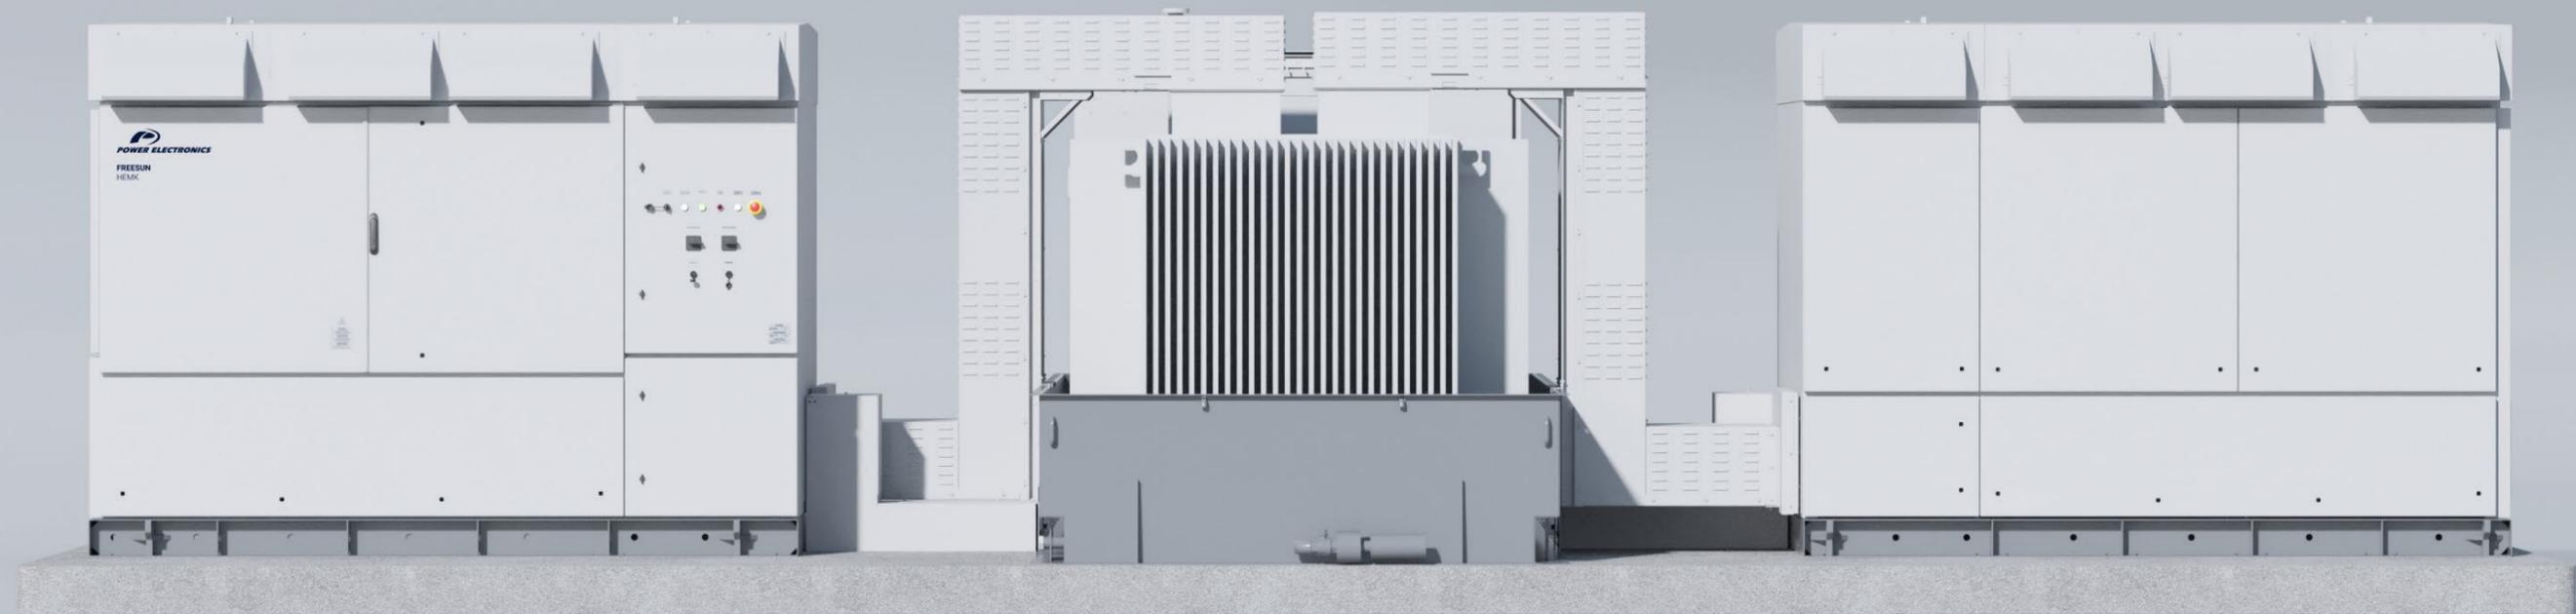

From 11 kV to 34.5 kV in the high voltage range

Power outputs from 3820 kVA to 8780 kVA

600 V - 690 V in the low voltage range

PPC PRO

Advanced control solutions to have everything in view. The real time of your photovoltaic plant.

The PPC PRO is an advanced control solution for any application, including utility scale PV and Hybrid Plants; self-consumption applications and zero grid injection systems.

Main governor of the most complex power plants by monitoring the point of interconnection (POI) and controlling the power generation.


Equipped with the latest PLC technology and implements the most sophisticated communication system and regulation algorithms to comply with the most demanding grid codes.




PPC PRO

Advanced and reliable functionalities. PPC PRO is used to manage PV plants in order to comply with all the utility and customer requirements, thanks to its fast and flexible control algorithms.


Smart Q distribution. This algorithm allows to distribute the reactive power between the inverters depending on the available active power, maximizing the energy production.

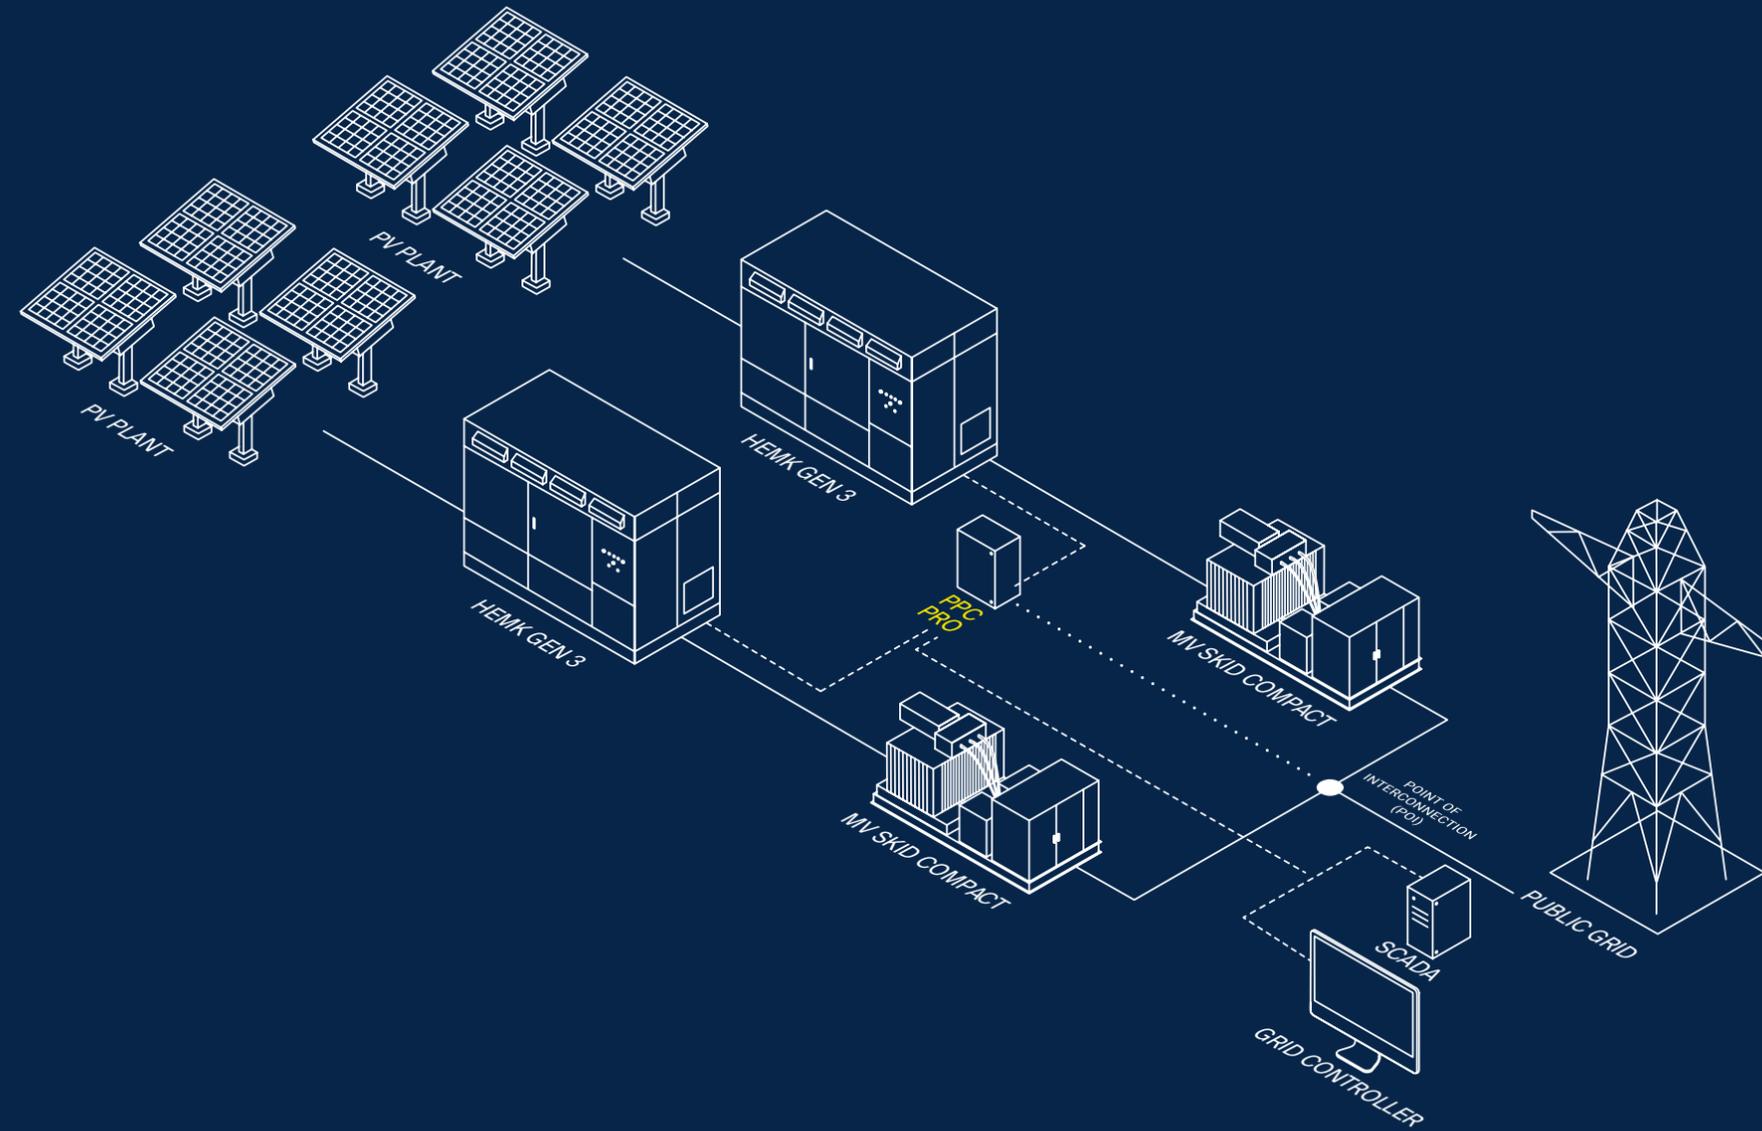

O&M diagnosis functions. Reports warning / fault messages and enables user management, real-time data monitoring, etc

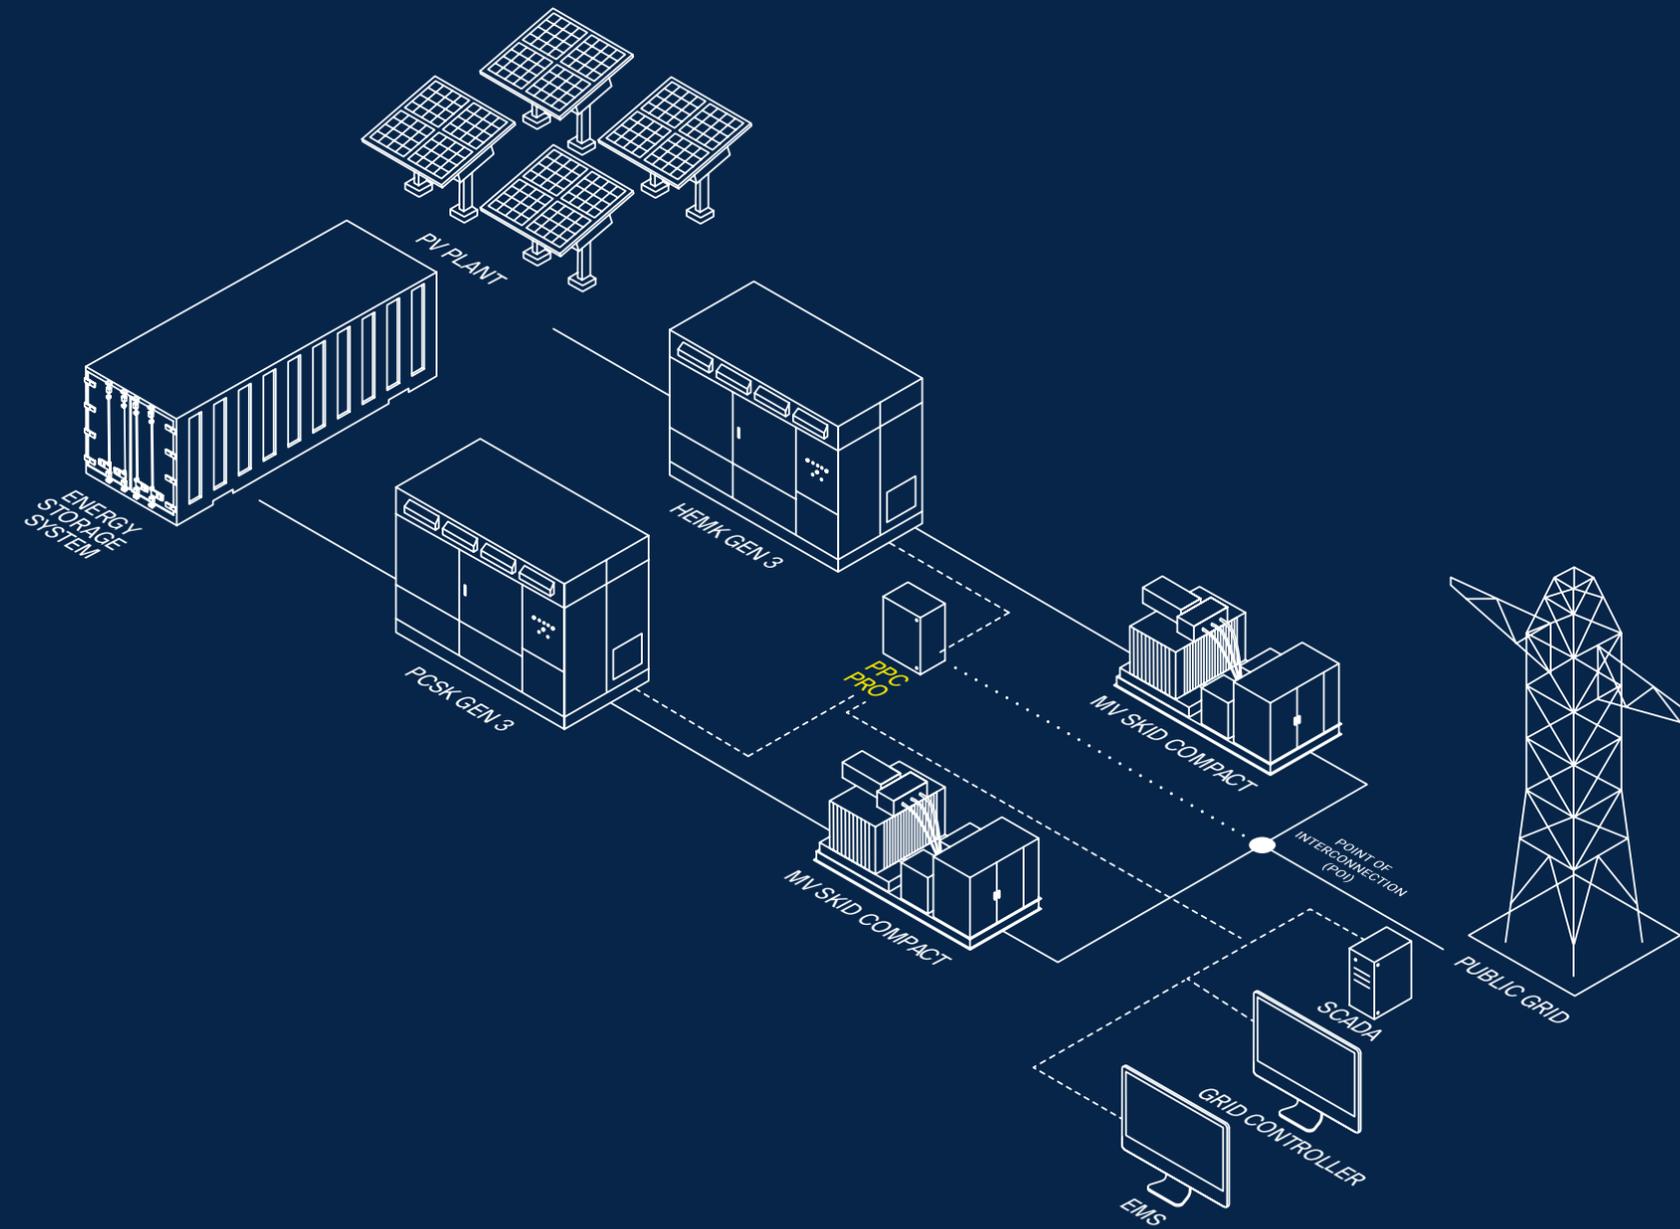

Hybrid plant

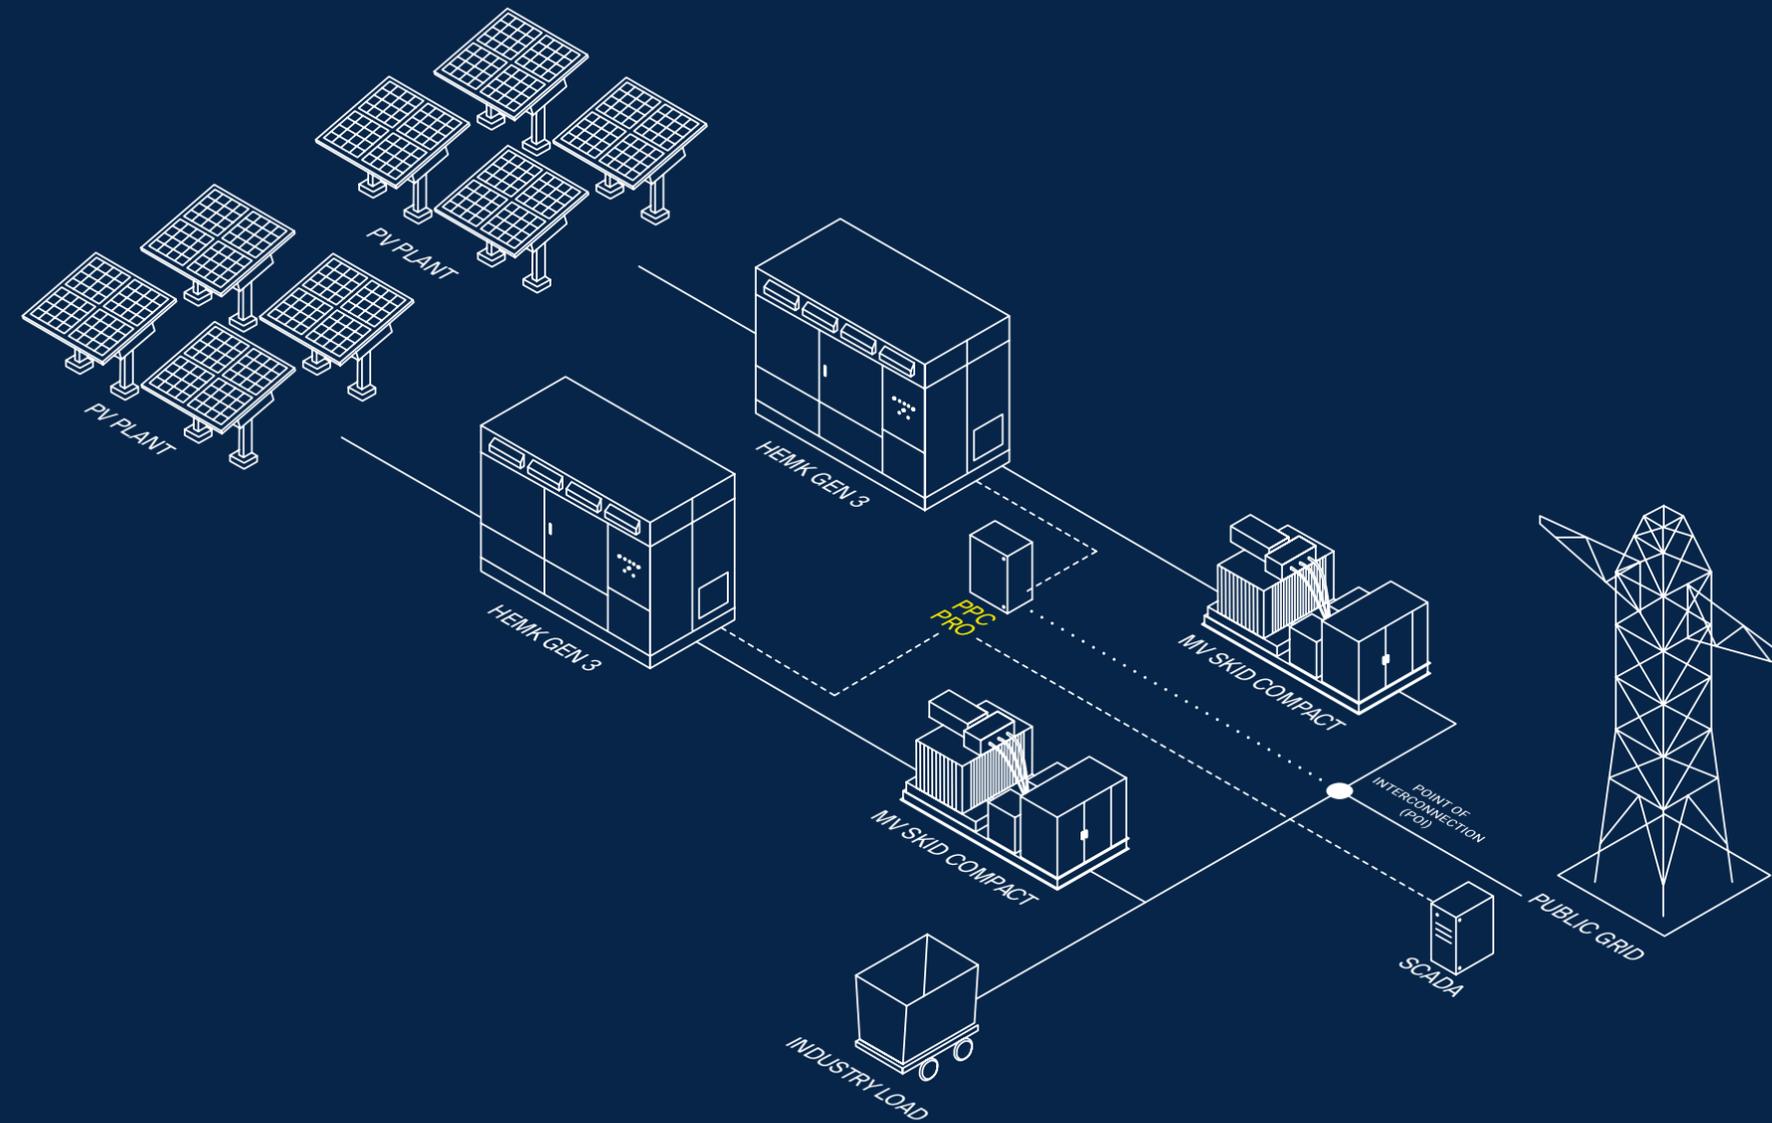

Maximize the efficiency of the system. Reduction of the electricity cost due to the energy consumption reduction from the grid.

The best solution for self-consumption applications.

Advanced, reliable and precise algorithms designed to match energy production and consumption.

Self-Consumption plant


Datasheets

Find all the specifications of our products just here.



Freesun HEM

UL

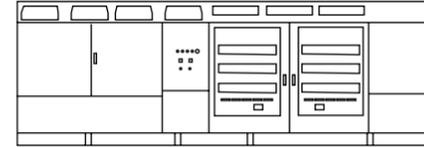


REFERENCES	FS4200M	FS4201M	
AC	AC Output Power (kVA/kW) @40°C ^[1]	4200	
	AC Output Power (kVA/kW) @50°C ^[1]	3900	
	Operating Grid Voltage (kV) ^[2]	34.5kV ±10%	13.8kV ±10%
	Operating Grid Frequency (Hz)	60Hz	
	Current Harmonic Distortion (THDi)	< 3% per IEEE519	
DC	Power Factor (cosine phi) ^[3]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night	
	DC Voltage Range ^[4]	934V - 1500V	
	Maximum DC Voltage	1500V	
	Number of Inputs	Up to 40	
	Max. DC Continuous Current (A) ^[5]	4590	
EFFICIENCY	Max. DC Short Circuit Current (A) ^[5]	6940	
	Number of Freemaq DC/DC ^[5]	Up to 4	
	Efficiency (Max) (φ)	98.00% including MV transformer	
	CEC (η)	97.53% including MV transformer	
	CABINET	Dimensions [WxDxH] (ft)	21.3 x 6.5 x 7.2
Dimensions [WxDxH] (m)		6.5 x 2.0 x 2.2	
Weight (lbs)		30865	
Weight (kg)		14000	
Type of Ventilation		Forced air cooling	
ENVIROMENT	Degree of Protection	NEMA 3R	
	Operating Temperature Range ^[6]	From -25°C to +60°C, >50°C power derating	
	Operating Relative Humidity Range	From 4% to 100% non-condensing	
	Storage Temperature Range	From -15°C to +40°C	
	Max. Altitude (above sea level) ^[7]	2000m	
CONTROL INTERFACE	Communication Protocol	Modbus TCP	
	Power Plant Controller	Optional	
	Keyed ON/OFF Switch	Standard	
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device	
	Humidity Control	Active heating	
	General AC Protection & Disconn.	MV switchgear (20 or 25 kA)	
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors	
	Overvoltage Protection	Type 2 protection for AC and DC	
CERTIFICATIONS & STANDARDS	Safety	UL 1741 / CSA 22.2 No.107.1-16	
	Installation	NEC 2020	
	Utility Interconnect ^[8]	UL 1741 SA & SB / RULE 21 / RULE 14H / IEEE 1547.1:2020	

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult Power Electronics for other configurations.
 [3] Consult P-Q charts available: $Q(kVA) = \sqrt{(S(kVA))^2 - P(kW)^2}$.
 [4] Consult Power Electronics for derating curves.
 [5] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [6] Optional available for temperatures down to -35°C.
 [7] Consult Power Electronics for altitudes above 1000m.
 [8] Consult Power Electronics for other applicable standards / grid codes.

Freesun HEM

IEC

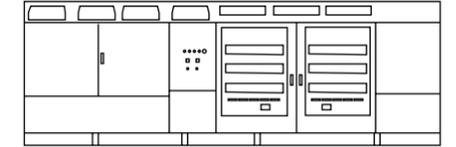


REFERENCES	FS4200MH	FS4202MH	
AC	AC Output Power (kVA/kW) @40°C ^[1]	4200	
	AC Output Power (kVA/kW) @50°C ^[1]	3900	
	Operating Grid Voltage (kV) ^[2]	34.5kV ±10%	33 kV ±10%
	Operating Grid Frequency (Hz)	60Hz	50Hz
	Current Harmonic Distortion (THDi)	< 3% per IEEE519	
DC	Power Factor (cosine phi) ^[3]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night	
	DC Voltage Range ^[4]	934V - 1500V	
	Maximum DC Voltage	1500V	
	Number of Inputs	Up to 40	
	Max. DC Continuous Current (A) ^[5]	4590	
EFFICIENCY	Max. DC Short Circuit Current (A) ^[5]	6940	
	Number of Freemaq DC/DC ^[5]	Up to 4	
	Efficiency (Max) (η) (preliminary)	97.8% including MV transformer	
	Euroeta (η) (preliminary)	97.51% including MV transformer	
	CABINET	Dimensions [WxDxH] (ft)	21.3 x 6.5 x 7.2
Dimensions [WxDxH] (m)		6.5 x 2.0 x 2.2	
Weight (lbs)		30865	
Weight (kg)		14000	
Type of Ventilation		Forced air cooling	
ENVIROMENT	Degree of Protection	IP55	
	Operating Temperature Range ^[6]	From -25°C to +60°C, >50°C power derating	
	Operating Relative Humidity Range	From 4% to 100% non-condensing	
	Storage Temperature Range	From -15°C to +40°C	
	Max. Altitude (above sea level) ^[7]	2000m	
CONTROL INTERFACE	Communication Protocol	Modbus TCP	
	Power Plant Controller	Optional	
	Keyed ON/OFF Switch	Standard	
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device	
	Humidity Control	Active heating	
	General AC Protection & Disconn.	MV switchgear (2L+V)	
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors	
	Overvoltage Protection	Type 2 protection for AC and DC	
CERTIFICATIONS & STANDARDS	Safety	IEC 62477-2	

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult Power Electronics for other configurations.
 [3] Consult P-Q charts available: $Q(kVA) = \sqrt{(S(kVA))^2 - P(kW)^2}$.
 [4] Consult Power Electronics for derating curves.
 [5] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [6] Optional available for temperatures down to -35°C.
 [7] Consult Power Electronics for altitudes above 1000m.

Freesun HEM

UL

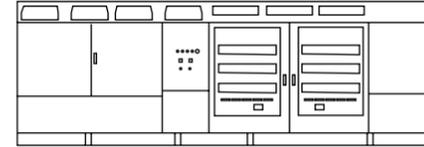


REFERENCES	FS4105M	
AC	AC Output Power (kVA/kW) @40°C ^[1]	4105
	AC Output Power (kVA/kW) @50°C ^[1]	3810
	Operating Grid Voltage (kV) ^[2]	34.5kV ±10%
	Operating Grid Frequency (Hz)	60Hz
	Current Harmonic Distortion (THDi)	< 3% per IEEE519
	Power Factor (cosine phi) ^[3]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night
DC	DC Voltage Range ^[4]	913V - 1500V
	Maximum DC Voltage	1500V
	Number of Inputs	Up to 40
	Max. DC Continuous Current (A) ^[5]	4590
	Max. DC Short Circuit Current (A) ^[5]	6940
	Number of Freemaq DC/DC ^[5]	Up to 4
EFFICIENCY	Efficiency (Max) (η)	97.93% including MV transformer
	CEC (η)	97.50% including MV transformer
CABINET	Dimensions [WxDxH] (ft)	21.3 x 6.5 x 7.2
	Dimensions [WxDxH] (m)	6.5 x 2.0 x 2.2
	Weight (lbs)	30865
	Weight (kg)	14000
	Type of Ventilation	Forced air cooling
ENVIROMENT	Degree of Protection	NEMA 3R
	Operating Temperature Range ^[6]	From -25°C to +60°C, >50°C power derating
	Operating Relative Humidity Range	From 4% to 100% non-condensing
	Storage Temperature Range	From -15°C to +40°C
	Max. Altitude (above sea level) ^[7]	2000m
CONTROL INTERFACE	Communication Protocol	Modbus TCP
	Power Plant Controller	Optional
	Keyed ON/OFF Switch	Standard
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device
	Humidity Control	Active heating
	General AC Protection & Disconn.	MV switchgear (20 or 25 kA)
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors
	Overvoltage Protection	Type 2 protection for AC and DC
CERTIFICATIONS & STANDARDS	Safety	UL 1741 / CSA 22.2 No.107.1-16
	Installation	NEC 2020
	Utility Interconnect ^[8]	UL 1741 SA & SB / RULE 21 / RULE 14H / IEEE 1547.1:2020

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult Power Electronics for other configurations.
 [3] Consult P-Q charts available: $Q(kVar) = \sqrt{(S(kVA))^2 - P(kW)^2}$.
 [4] Consult Power Electronics for derating curves.
 [5] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [6] Optional available for temperatures down to -35°C.
 [7] Consult Power Electronics for altitudes above 1000m.
 [8] Consult Power Electronics for other applicable standards / grid codes.

Freesun HEM

IEC

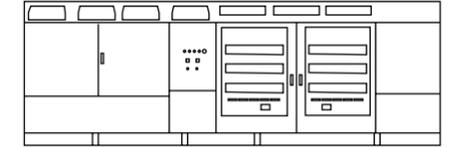


REFERENCES	FS4105MH	
AC	AC Output Power (kVA/kW) @40°C ^[1]	4105
	AC Output Power (kVA/kW) @50°C ^[1]	3810
	Operating Grid Voltage (kV) ^[2]	34.5kV ±10%
	Operating Grid Frequency (Hz)	60Hz
	Current Harmonic Distortion (THDi)	< 3% per IEEE519
	Power Factor (cosine phi) ^[3]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night
DC	DC Voltage Range ^[4]	913V - 1500V
	Maximum DC Voltage	1500V
	Number of Inputs	Up to 40
	Max. DC Continuous Current (A) ^[5]	4590
	Max. DC Short Circuit Current (A) ^[5]	6940
	Number of Freemaq DC/DC ^[5]	Up to 4
EFFICIENCY	Efficiency (Max) (η) (preliminary)	97.76% including MV transformer
	Euroeta (η) (preliminary)	97.50% including MV transformer
CABINET	Dimensions [WxDxH] (ft)	21.3 x 6.5 x 7.2
	Dimensions [WxDxH] (m)	6.5 x 2.0 x 2.2
	Weight (lbs)	30865
	Weight (kg)	14000
	Type of Ventilation	Forced air cooling
ENVIROMENT	Degree of Protection	IP55
	Operating Temperature Range ^[6]	From -25°C to +60°C, >50°C power derating
	Operating Relative Humidity Range	From 4% to 100% non-condensing
	Storage Temperature Range	From -15°C to +40°C
	Max. Altitude (above sea level) ^[7]	2000m
CONTROL INTERFACE	Communication Protocol	Modbus TCP
	Power Plant Controller	Optional
	Keyed ON/OFF Switch	Standard
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device
	Humidity Control	Active heating
	General AC Protection & Disconn.	MV switchgear (2L+V)
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors
	Overvoltage Protection	Type 2 protection for AC and DC
CERTIFICATIONS & STANDARDS	Safety	IEC 62477-2

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult Power Electronics for other configurations.
 [3] Consult P-Q charts available: $Q(kVar) = \sqrt{(S(kVA))^2 - P(kW)^2}$.
 [4] Consult Power Electronics for derating curves.
 [5] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [6] Optional available for temperatures down to -35°C.
 [7] Consult Power Electronics for altitudes above 1000m.

Freesun HEM

UL

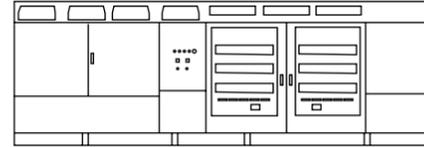


REFERENCES	FS4010M	
AC	AC Output Power (kVA/kW) @40°C ^[1]	4010
	AC Output Power (kVA/kW) @50°C ^[1]	3720
	Operating Grid Voltage (kV) ^[2]	34.5kV ±10%
	Operating Grid Frequency (Hz)	60Hz
	Current Harmonic Distortion (THDi)	< 3% per IEEE519
	Power Factor (cosine phi) ^[3]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night
DC	DC Voltage Range ^[4]	891V - 1500V
	Maximum DC Voltage	1500V
	Number of Inputs	Up to 40
	Max. DC Continuous Current (A) ^[5]	4590
	Max. DC Short Circuit Current (A) ^[5]	6940
	Number of Freemaq DC/DC ^[5]	Up to 4
EFFICIENCY	Efficiency (Max) (η)	97.91% including MV transformer
	CEC (η)	97.49% including MV transformer
CABINET	Dimensions [WxDxH] (ft)	21.3 x 6.5 x 7.2
	Dimensions [WxDxH] (m)	6.5 x 2.0 x 2.2
	Weight (lbs)	30865
	Weight (kg)	14000
	Type of Ventilation	Forced air cooling
ENVIROMENT	Degree of Protection	NEMA 3R
	Operating Temperature Range ^[6]	From -25°C to +60°C, >50°C power derating
	Operating Relative Humidity Range	From 4% to 100% non-condensing
	Storage Temperature Range	From -15°C to +40°C
	Max. Altitude (above sea level) ^[7]	2000m
CONTROL INTERFACE	Communication Protocol	Modbus TCP
	Power Plant Controller	Optional
	Keyed ON/OFF Switch	Standard
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device
	Humidity Control	Active heating
	General AC Protection & Disconn.	MV switchgear (20 or 25 kA)
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors
	Overvoltage Protection	Type 2 protection for AC and DC
CERTIFICATIONS & STANDARDS	Safety	UL 1741 / CSA 22.2 No.107.1-16
	Installation	NEC 2020
	Utility Interconnect ^[8]	UL 1741 SA & SB / RULE 21 / RULE 14H / IEEE 1547.1:2020

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult Power Electronics for other configurations.
 [3] Consult P-Q charts available: $Q(kVAr) = \sqrt{(S(kVA))^2 - P(kW)^2}$.
 [4] Consult Power Electronics for derating curves.
 [5] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [6] Optional available for temperatures down to -35°C.
 [7] Consult Power Electronics for altitudes above 1000m.
 [8] Consult Power Electronics for other applicable standards / grid codes.

Freesun HEM


IEC

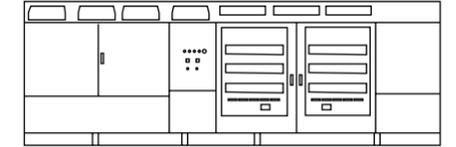

REFERENCES	FS4010MH	
AC	AC Output Power (kVA/kW) @40°C ^[1]	4010
	AC Output Power (kVA/kW) @50°C ^[1]	3720
	Operating Grid Voltage (kV) ^[2]	34.5kV ±10%
	Operating Grid Frequency (Hz)	60Hz
	Current Harmonic Distortion (THDi)	< 3% per IEEE519
	Power Factor (cosine phi) ^[3]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night
DC	DC Voltage Range ^[4]	891V - 1500V
	Maximum DC Voltage	1500V
	Number of Inputs	Up to 40
	Max. DC Continuous Current (A) ^[5]	4590
	Max. DC Short Circuit Current (A) ^[5]	6940
	Number of Freemaq DC/DC ^[5]	Up to 4
EFFICIENCY	Efficiency (Max) (η) (preliminary)	97.75% including MV transformer
	Euroeta (η) (preliminary)	97.48% including MV transformer
CABINET	Dimensions [WxDxH] (ft)	21.3 x 6.5 x 7.2
	Dimensions [WxDxH] (m)	6.5 x 2.0 x 2.2
	Weight (lbs)	30865
	Weight (kg)	14000
	Type of Ventilation	Forced air cooling
ENVIROMENT	Degree of Protection	IP55
	Operating Temperature Range ^[6]	From -25°C to +60°C, >50°C power derating
	Operating Relative Humidity Range	From 4% to 100% non-condensing
	Storage Temperature Range	From -15°C to +40°C
	Max. Altitude (above sea level) ^[7]	2000m
CONTROL INTERFACE	Communication Protocol	Modbus TCP
	Power Plant Controller	Optional
	Keyed ON/OFF Switch	Standard
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device
	Humidity Control	Active heating
	General AC Protection & Disconn.	MV switchgear (2L+V)
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors
	Overvoltage Protection	Type 2 protection for AC and DC
CERTIFICATIONS & STANDARDS	Safety	IEC 62477-2

NOTES


- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult Power Electronics for other configurations.
 [3] Consult P-Q charts available: $Q(kVAr) = \sqrt{(S(kVA))^2 - P(kW)^2}$.
 [4] Consult Power Electronics for derating curves.
 [5] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [6] Optional available for temperatures down to -35°C.
 [7] Consult Power Electronics for altitudes above 1000m.

Freesun HEMK
690V


690V	FRAME 2	FRAME 3	FRAME 4	
REFERENCES	FS2195K	FS3290K	FS4390K	
AC	AC Output Power (kVA/kW) @40°C ^[1]	2195	4390	
	AC Output Power (kVA/kW) @50°C ^[1]	2035	4075	
	Max. AC Output Current (A) @40°C	1837	3674	
	Operating Grid Voltage (VAC)	690V ±10%		
	Operating Grid Frequency (Hz)	50/60Hz		
	Current Harmonic Distortion (THDi)	< 3% per IEEE519		
Power Factor (cosine phi) ^[2]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night			
DC	DC Voltage Range ^[3]	976V - 1500V		
	Maximum DC Voltage	1500V		
	Number of Inputs	Up to 20	Up to 30	Up to 40
	Max. DC Continuous Current (A) ^[4]	2295	3443	4590
	Max. DC Short Circuit Current (A) ^[4]	3470	5205	6940
Number of Freemaq DC/DC ^[4]	Up to 4			
EFFICIENCY	Efficiency (Max) (η) (preliminary)	98.84%	98.87%	98.93%
	Euroeta (η) (preliminary)	98.45%	98.48%	98.65%
CABINET	Dimensions [WxDxH] (ft)	9.8 x 6.5 x 7.2		
	Dimensions [WxDxH] (m)	3.0 x 2.0 x 2.2		
	Weight (lbs)	11465	11795	12125
	Weight (kg)	5200	5350	5500
	Type of Ventilation	Forced air cooling		
ENVIROMENT	Degree of Protection	NEMA 3R / IP55		
	Operating Temperature Range ^[5]	From -25°C to +60°C, >50°C power derating		
	Operating Relative Humidity Range	From 4% to 100% non-condensing		
	Storage Temperature Range	From -15°C to +40°C		
	Max. Altitude (above sea level)	2000m / >2000m power derating (Max. 4000m)		
CONTROL INTERFACE	Communication Protocol	Modbus TCP		
	Power Plant Controller	Optional		
	Keyed ON/OFF Switch	Standard		
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device		
	Humidity Control	Active heating		
	General AC Protection & Disconn.	Circuit breaker		
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors		
Overvoltage Protection	Type 2 protection for AC and DC			
CERTIFICATIONS & STANDARDS	Safety	UL 1741 / CSA 22.2 No.1071-16 / IEC 62109-1 / IEC 62109-2		
	Installation	NEC 2020 / IEC		
	Utility Interconnect	UL 1741 SA & SB / RULE 21 / RULE 14H / IEEE 15471 2020 / IEC 62116:2014		

NOTES


- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult P-Q charts available: $Q(kVar)=\sqrt{(S(kVA))^2-P(kW)^2}$.
 [3] Consult Power Electronics for derating curves.
 [4] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [5] Optional available for temperatures down to -35°C.

Freesun HEMK
660V


660V	FRAME 2	FRAME 3	FRAME 4	
REFERENCES	FS2101K	FS3151K	FS4200K	
AC	AC Output Power (kVA/kW) @40°C ^[1]	2100	4200	
	AC Output Power (kVA/kW) @50°C ^[1]	1950	3900	
	Max. AC Output Current (A) @40°C	1837	3674	
	Operating Grid Voltage (VAC)	660V ±10%		
	Operating Grid Frequency (Hz)	50/60Hz		
	Current Harmonic Distortion (THDi)	< 3% per IEEE519		
Power Factor (cosine phi) ^[2]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night			
DC	DC Voltage Range ^[3]	934V - 1500V		
	Maximum DC Voltage	1500V		
	Number of Inputs	Up to 20	Up to 30	Up to 40
	Max. DC Continuous Current (A) ^[4]	2295	3443	4590
	Max. DC Short Circuit Current (A) ^[4]	3470	5205	6940
Number of Freemaq DC/DC ^[4]	Up to 4			
EFFICIENCY	Efficiency (Max) (η) (preliminary)	98.81%	98.84%	98.90%
	Euroeta (η) (preliminary)	98.45%	98.48%	98.65%
CABINET	Dimensions [WxDxH] (ft)	9.8 x 6.5 x 7.2		
	Dimensions [WxDxH] (m)	3.0 x 2.0 x 2.2		
	Weight (lbs)	11465	11795	12125
	Weight (kg)	5200	5350	5500
	Type of Ventilation	Forced air cooling		
ENVIROMENT	Degree of Protection	NEMA 3R / IP55		
	Operating Temperature Range ^[5]	From -25°C to +60°C, >50°C power derating		
	Operating Relative Humidity Range	From 4% to 100% non-condensing		
	Storage Temperature Range	From -15°C to +40°C		
	Max. Altitude (above sea level)	2000m / >2000m power derating (Max. 4000m)		
CONTROL INTERFACE	Communication Protocol	Modbus TCP		
	Power Plant Controller	Optional		
	Keyed ON/OFF Switch	Standard		
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device		
	Humidity Control	Active heating		
	General AC Protection & Disconn.	Circuit breaker		
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors		
Overvoltage Protection	Type 2 protection for AC and DC			
CERTIFICATIONS & STANDARDS	Safety	UL 1741 / CSA 22.2 No.1071-16 / IEC 62109-1 / IEC 62109-2		
	Installation	NEC 2020 / IEC		
	Utility Interconnect	UL 1741 SA & SB / RULE 21 / RULE 14H / IEEE 15471 2020 / IEC 62116:2014		

NOTES


- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult P-Q charts available: $Q(kVar)=\sqrt{(S(kVA))^2-P(kW)^2}$.
 [3] Consult Power Electronics for derating curves.
 [4] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [5] Optional available for temperatures down to -35°C.

Freesun HEMK
645V


645V	FRAME 2	FRAME 3	FRAME 4	
REFERENCES	FS2055K	FS3080K	FS4105K	
AC	AC Output Power (kVA/kW) @40°C ^[1]	2055	4105	
	AC Output Power (kVA/kW) @50°C ^[1]	1905	3810	
	Max. AC Output Current (A) @40°C	1837	3674	
	Operating Grid Voltage (VAC)	645V ±10%		
	Operating Grid Frequency (Hz)	50/60Hz		
	Current Harmonic Distortion (THDi)	< 3% per IEEE519		
Power Factor (cosine phi) ^[2]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night			
DC	DC Voltage Range ^[3]	913V - 1500V		
	Maximum DC Voltage	1500V		
	Number of Inputs	Up to 20	Up to 30	Up to 40
	Max. DC Continuous Current (A) ^[4]	2295	3443	4590
	Max. DC Short Circuit Current (A) ^[4]	3470	5205	6940
Number of Freemaq DC/DC ^[4]	Up to 4			
EFFICIENCY	Efficiency (Max) (η) (preliminary)	98.78%	98.81%	98.87%
	Euroeta (η) (preliminary)	98.40%	98.43%	98.60%
CABINET	Dimensions [WxDxH] (ft)	9.8 x 6.5 x 7.2		
	Dimensions [WxDxH] (m)	3.0 x 2.0 x 2.2		
	Weight (lbs)	11465	11795	12125
	Weight (kg)	5200	5350	5500
	Type of Ventilation	Forced air cooling		
ENVIROMENT	Degree of Protection	NEMA 3R / IP55		
	Operating Temperature Range ^[5]	From -25°C to +60°C, >50°C power derating		
	Operating Relative Humidity Range	From 4% to 100% non-condensing		
	Storage Temperature Range	From -15°C to +40°C		
	Max. Altitude (above sea level)	2000m / >2000m power derating (Max. 4000m)		
CONTROL INTERFACE	Communication Protocol	Modbus TCP		
	Power Plant Controller	Optional		
	Keyed ON/OFF Switch	Standard		
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device		
	Humidity Control	Active heating		
	General AC Protection & Disconn.	Circuit breaker		
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors		
Overvoltage Protection	Type 2 protection for AC and DC			
CERTIFICATIONS & STANDARDS	Safety	UL 1741 / CSA 22.2 No.1071-16 / IEC 62109-1 / IEC 62109-2		
	Installation	NEC 2020 / IEC		
	Utility Interconnect	UL 1741 SA & SB / RULE 21 / RULE 14H / IEEE 15471 2020 / IEC 62116:2014		

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult P-Q charts available: $Q(kVAr)=\sqrt{(S(kVA))^2-P(kW)^2}$.
 [3] Consult Power Electronics for derating curves.
 [4] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [5] Optional available for temperatures down to -35°C.


Freesun HEMK
630V


630V	FRAME 2	FRAME 3	FRAME 4	
REFERENCES	FS2005K	FS3005K	FS4010K	
AC	AC Output Power (kVA/kW) @40°C ^[1]	2005	4010	
	AC Output Power (kVA/kW) @50°C ^[1]	1860	3720	
	Max. AC Output Current (A) @40°C	1837	3674	
	Operating Grid Voltage (VAC)	630V ±10%		
	Operating Grid Frequency (Hz)	50/60Hz		
	Current Harmonic Distortion (THDi)	< 3% per IEEE519		
Power Factor (cosine phi) ^[2]	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night			
DC	DC Voltage Range ^[3]	891V - 1500V		
	Maximum DC Voltage	1500V		
	Number of Inputs	Up to 20	Up to 30	Up to 40
	Max. DC Continuous Current (A) ^[4]	2295	3443	4590
	Max. DC Short Circuit Current (A) ^[4]	3470	5205	6940
Number of Freemaq DC/DC ^[4]	Up to 4			
EFFICIENCY	Efficiency (Max) (η) (preliminary)	98.76%	98.79%	98.85%
	Euroeta (η) (preliminary)	98.39%	98.42%	98.59%
CABINET	Dimensions [WxDxH] (ft)	9.8 x 6.5 x 7.2		
	Dimensions [WxDxH] (m)	3.0 x 2.0 x 2.2		
	Weight (lbs)	11465	11795	12125
	Weight (kg)	5200	5350	5500
	Type of Ventilation	Forced air cooling		
ENVIROMENT	Degree of Protection	NEMA 3R / IP55		
	Operating Temperature Range ^[5]	From -25°C to +60°C, >50°C power derating		
	Operating Relative Humidity Range	From 4% to 100% non-condensing		
	Storage Temperature Range	From -15°C to +40°C		
	Max. Altitude (above sea level)	2000m / >2000m power derating (Max. 4000m)		
CONTROL INTERFACE	Communication Protocol	Modbus TCP		
	Power Plant Controller	Optional		
	Keyed ON/OFF Switch	Standard		
PROTECTIONS	Ground Fault Protection	GFDI and isolation monitoring device		
	Humidity Control	Active heating		
	General AC Protection & Disconn.	Circuit breaker		
	General DC Protection & Disconn.	Fuses, DC switch-disconnectors		
Overvoltage Protection	Type 2 protection for AC and DC			
CERTIFICATIONS & STANDARDS	Safety	UL 1741 / CSA 22.2 No.1071-16 / IEC 62109-1 / IEC 62109-2		
	Installation	NEC 2020 / IEC		
	Utility Interconnect	UL 1741 SA & SB / RULE 21 / RULE 14H / IEEE 15471 2020 / IEC 62116:2014		

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult P-Q charts available: $Q(kVAr)=\sqrt{(S(kVA))^2-P(kW)^2}$.
 [3] Consult Power Electronics for derating curves.
 [4] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [5] Optional available for temperatures down to -35°C.

Freesun HEMK 615V




615V	FRAME 2	FRAME 3	FRAME 4
REFERENCES	FS1955K	FS2935K	FS3915K
AC	AC Output Power (kVA/kW) @40°C ^[1]		
	1955	2935	3915
	AC Output Power (kVA/kW) @50°C ^[1]		
	1815	2725	3635
	Max. AC Output Current (A) @40°C		
	1837	2756	3674
DC	Operating Grid Voltage (VAC)		
	615V ±10%		
	Operating Grid Frequency (Hz)		
	50/60Hz		
	Current Harmonic Distortion (THDi)		
	< 3% per IEEE519		
EFFICIENCY	Power Factor (cosine phi) ^[2]		
	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night		
	DC Voltage Range ^[3]		
	870V - 1500V		
	Maximum DC Voltage		
	1500V		
CABINET	Number of Inputs	Up to 20	Up to 30
	Max. DC Continuous Current (A) ^[4]	2295	3443
	Max. DC Short Circuit Current (A) ^[4]	3470	5205
	Number of Freemaq DC/DC ^[4]	Up to 4	
	Efficiency (Max) (η) (preliminary)	98.76%	98.79%
ENVIROMENT	Euroeta (η) (preliminary)		
	98.38%		
	Dimensions [WxDxH] (ft)		
	9.8 x 6.5 x 7.2		
	Dimensions [WxDxH] (m)		
3.0 x 2.0 x 2.2			
CONTROL INTERFACE	Weight (lbs)	11465	12125
	Weight (kg)	5200	5500
	Type of Ventilation	Forced air cooling	
	Degree of Protection	NEMA 3R / IP55	
	Operating Temperature Range ^[5]	From -25°C to +60°C, >50°C power derating	
PROTECTIONS	Operating Relative Humidity Range		
	From 4% to 100% non-condensing		
	Storage Temperature Range		
	From -15°C to +40°C		
	Max. Altitude (above sea level)		
2000m / >2000m power derating (Max. 4000m)			
CERTIFICATIONS & STANDARDS	Communication Protocol		
	Modbus TCP		
	Power Plant Controller		
	Optional		
	Keyed ON/OFF Switch		
Standard			
PROTECTIONS	Ground Fault Protection		
	GFDI and isolation monitoring device		
	Humidity Control		
	Active heating		
	General AC Protection & Disconn.		
Circuit breaker			
CERTIFICATIONS & STANDARDS	General DC Protection & Disconn.		
	Fuses, DC switch-disconnectors		
	Overvoltage Protection		
	Type 2 protection for AC and DC		
	Safety		
UL 1741 / CSA 22.2 No.1071-16 / IEC 62109-1 / IEC 62109-2			
CERTIFICATIONS & STANDARDS	Installation		
	NEC 2020 / IEC		
	Utility Interconnect		
	UL 1741 SA & SB / RULE 21 / RULE 14H / IEEE 15471 2020 / IEC 62116:2014		

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult P-Q charts available: $Q(kVAr)=\sqrt{(S(kVA))^2-P(kW)^2}$.
 [3] Consult Power Electronics for derating curves.
 [4] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [5] Optional available for temperatures down to -35°C.

Freesun HEMK 600V




600V	FRAME 2	FRAME 3	FRAME 4
REFERENCES	FS1910K	FS2865K	FS3820K
AC	AC Output Power (kVA/kW) @40°C ^[1]		
	1910	2865	3820
	AC Output Power (kVA/kW) @50°C ^[1]		
	1775	2660	3545
	Max. AC Output Current (A) @40°C		
	1837	2756	3674
DC	Operating Grid Voltage (VAC)		
	600V ±10%		
	Operating Grid Frequency (Hz)		
	50/60Hz		
	Current Harmonic Distortion (THDi)		
	< 3% per IEEE519		
EFFICIENCY	Power Factor (cosine phi) ^[2]		
	0.5 leading ... 0.5 lagging adjustable / Reactive power injection at night		
	DC Voltage Range ^[3]		
	849V - 1500V		
	Maximum DC Voltage		
	1500V		
CABINET	Number of Inputs	Up to 20	Up to 30
	Max. DC Continuous Current (A) ^[4]	2295	3443
	Max. DC Short Circuit Current (A) ^[4]	3470	5205
	Number of Freemaq DC/DC ^[4]	Up to 4	
	Efficiency (Max) (η) (preliminary)	98.76%	98.78%
ENVIROMENT	Euroeta (η) (preliminary)		
	98.37%		
	Dimensions [WxDxH] (ft)		
	9.8 x 6.5 x 7.2		
	Dimensions [WxDxH] (m)		
3.0 x 2.0 x 2.2			
CONTROL INTERFACE	Weight (lbs)	11465	12125
	Weight (kg)	5200	5500
	Type of Ventilation	Forced air cooling	
	Degree of Protection	NEMA 3R / IP55	
	Operating Temperature Range ^[5]	From -25°C to +60°C, >50°C power derating	
PROTECTIONS	Operating Relative Humidity Range		
	From 4% to 100% non-condensing		
	Storage Temperature Range		
	From -15°C to +40°C		
	Max. Altitude (above sea level)		
2000m / >2000m power derating (Max. 4000m)			
CERTIFICATIONS & STANDARDS	Communication Protocol		
	Modbus TCP		
	Power Plant Controller		
	Optional		
	Keyed ON/OFF Switch		
Standard			
PROTECTIONS	Ground Fault Protection		
	GFDI and isolation monitoring device		
	Humidity Control		
	Active heating		
	General AC Protection & Disconn.		
Circuit breaker			
CERTIFICATIONS & STANDARDS	General DC Protection & Disconn.		
	Fuses, DC switch-disconnectors		
	Overvoltage Protection		
	Type 2 protection for AC and DC		
	Safety		
UL 1741 / CSA 22.2 No.1071-16 / IEC 62109-1 / IEC 62109-2			
CERTIFICATIONS & STANDARDS	Installation		
	NEC 2020 / IEC		
	Utility Interconnect		
	UL 1741 SA & SB / RULE 21 / RULE 14H / IEEE 15471 2020 / IEC 62116:2014		

NOTES

- [1] Values at 1.00-Vac nom and cosφ=1. Consult Power Electronics for derating curves.
 [2] Consult P-Q charts available: $Q(kVAr)=\sqrt{(S(kVA))^2-P(kW)^2}$.
 [3] Consult Power Electronics for derating curves.
 [4] Consult Power Electronics for Freemaq DC/DC connection configurations.
 [5] Optional available for temperatures down to -35°C.



DC/DC



REFERENCES	FD1200	
DC INPUT & OUTPUT	DC Rated Power (kW) @ 30 °C	1200
	DC Rated Power (kW) @ 40 °C	1120
	DC Rated Power (kW) @ 50 °C	1040
	Max. DC Output Current (A) @ 30 °C	1200
	Max. DC Output Current (A) @ 40 °C	1120
	Max. DC Output Current (A) @ 50 °C	1040
	DC PV Voltage Range (Vdc) ^[1]	850 - 1500
	DC ESS Voltage Range (Vdc) ^[1]	850 - 1500
	Maximum DC PV Input Voltage (Vdc)	1500
	DC Voltage Ripple	< 3%
Battery Technology	Compatible with all battery technologies	
EFFICIENCY	Efficiency (Max)	98.9% (preliminary)
	Dimensions [WxDxH] (ft)	3.94 x 5.90 x 7.56
CABINET	Dimensions [WxDxH] (m)	1.20 x 1.80 x 2.30
	Cooling	Forced air
	Enclosure Protection Degree	NEMA 3R / IP54
CONNECTIONS	Number of PV connections	4 negative / 4 positive
	Operating Temperature Range ^[2]	-25°C to +60°C, >50°C / Active Power derating
ENVIRONMENT	Relative Humidity	From 4% to 100% non-condensing
	Max. Altitude (above sea level)	4000 m (> 2000 m power derating)
CONTROL INTERFACE	Interfaces	Emergency stop pushbutton and indicator lights
PROTECTIONS	Communications Protocol	Modbus TCP
	PV side	DC switch-disconnector
CERTIFICATIONS	BESS side	DC switch-disconnector ^[3]
	Safety	UL1741, IEC 62109


NOTES

[1] Consult Power Electronics for derating curves.

[2] Consult Power Electronics for temperatures below -25°C.

[3] Battery short circuit disconnection must be done on the battery side.

MV Skid Compact

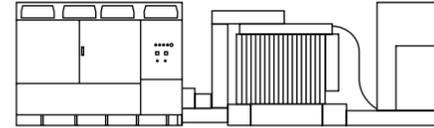


RATINGS	Power range @ 40 °C	1910 kVA - 4390 kVA	
	Power range @ 50 °C	1775 kVA - 4075 kVA	
	MV voltage range	6.6 kV / 11 kV / 13.2 kV / 13.8 kV / 15 kV / 20 kV / 22 kV / 23 kV / 25 kV / 30 kV / 33 kV / 34.5 kV	
	LV voltage range	600 V / 615 V / 630 V / 645 V / 660 V / 690 V	
	Transformer cooling	ONAN	
	Transformer vector group	Dy11	
MEDIUM VOLTAGE EQUIPMENT	Transformer protection	Protection relay for pressure, temperature (two levels) and gassing Monitoring of dielectric level decrease PT100 optional	
	Transformer index of protection	IP54	
	Transformer losses	IEC standard or IEC Tier-2	
	Oil retention tank	Galvanized steel. Integrated with hydrocarbon filter. Optional	
	Switchgear configuration	Double feeder (2L)	
	Switchgear protection	Circuit breaker (V)	
	Switchgear short circuit rating ^[1]	16 kA 1 s (optionally 20 kA or 25 kA)	
	Switchgear IAC [1]	A FLR 16 kA 1 s	
	CONNECTIONS	LV-MV connections	Close coupled solution (plug & play)
		LV protection	Motorized circuit breaker included in the inverter
HV AC wiring		MV bridge between transformer and protection switchgear prewired	
ENVIRONMENT	Ambient temperature range ^[2]	-25 °C... +50 °C (T > 50 °C power derating)	
	Maximum altitude (above sea level) ^[1]	Up to 1000 m	
	Relative humidity	4% to 95% non condensing	
AUXILIARY SERVICES	User cabinet	Integrated in the inverter (by default). Optionally, LV cabinet in the skid	
	UPS system ^[1]	1 kVA/1 kW (12 minutes). Optional	
OTHER EQUIPMENT	Safety mechanism	Interlocking system	
	Fire suppression system	Transformer oil tank retention accessory. Optional	
STANDARDS	Compliance	IEC 62271-212, IEC 62271-200, IEC 60076, IEC 61439-1	

NOTES

- [1] Consult with Power Electronics for other options.
[2] For lower temperatures, consult with Power Electronics.

Twin Skid Compact

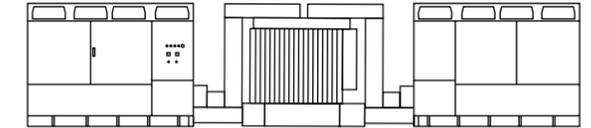

RATINGS	Power range @ 40 °C	3820 kVA - 8780 kVA	
	Power range @ 50 °C	3550 kVA - 8150 kVA	
	MV voltage range	11 kV / 13.2 kV / 13.8 kV / 15 kV / 20 kV / 22 kV / 23 kV / 25 kV / 30 kV / 33 kV / 34.5 kV	
	LV voltage range	600 V / 615 V / 630 V / 645 V / 660 V / 690 V	
	Transformer cooling	ONAN	
	Transformer vector group	Dy11y11	
MEDIUM VOLTAGE EQUIPMENT	Transformer protection	Protection relay for pressure, temperature (two levels) and gassing. Monitoring of dielectric level decrease PT100 optional	
	Transformer index of protection	IP54	
	Transformer losses	IEC standard or IEC Tier-2	
	Oil retention tank	Galvanized steel. Integrated with hydrocarbon filter. Optional	
	Switchgear configuration	Double feeder (2L)	
	Switchgear protection	Circuit breaker (V)	
	Switchgear short circuit rating ^[1]	16 kA 1 s (optionally 20 kA or 25 kA)	
	Switchgear IAC ^[1]	A FLR 16 kA 1 s	
	CONNECTIONS	LV-MV connections	Close coupled solution (plug & play)
		LV protection	Motorized circuit breaker included in the inverter
HV AC wiring		MV bridge between transformer and protection switchgear prewired	
ENVIRONMENT	Ambient temperature range ^[2]	-25 °C... +50 °C (T > 50 °C power derating)	
	Maximum altitude (above sea level) ^[1]	Up to 1000 m	
	Relative humidity	4% to 95% non condensing	
AUXILIARY SERVICES	User cabinet	Integrated in the inverter (by default). Optionally, LV cabinet in the skid	
	UPS system ^[1]	1 kVA/1 kW (12 minutes). Optional	
OTHER EQUIPMENT	Safety mechanism	Interlocking system	
	Fire suppression system	Transformer oil tank retention accessory. Optional	
STANDARDS	Compliance	IEC 62271-212, IEC 62271-200, IEC 60076, IEC 61439-1	

NOTES

- [1] Consult with Power Electronics for other options.
[2] For lower temperatures, consult with Power Electronics.

PPC PRO




GENERAL DATA	Material	Polycarbonate
	Assembly	Wall or struture mounted
	Flammability	Halogen-free, self-extinguishing enclosure material (UL94-5V)
	Power Supply	80 W. [220/240 Vac (IEC) - 110/115 Vac (UL)]. [110-290 Vdc]
	Compatible inverters	HEM, HEMK, PCSM, PCSK, Freemaq Statcom
COMMUNICATIONS	Communication protocols	Modbus TCP. Consult with Power Electronics for other options
	Communication Switch	6 RJ45 Ports + 2 FO Multi Mode SC connectors
ENVIRONMENTAL CONDITIONS	Temperature range	From -20 to +50°C
	Humidity	From 15 to 95 % (0 to 95 % non-condensing).
	Protection degree	IP54 / NEMA 3
	Pollution degree	Type II
	Maximum altitude	4000 m
CERTIFICATIONS	Marking	CE
FUNCTIONALITIES [1]	Active power control	Active power control, frequency response (with /without reserve), ramp rate. Negative and positive active power setpoints.
	Reactive power control	Reactive power control, power factor control, voltage control, Q(V) curve, cosphi(P) curve, ramp rate, statcom control, capacitor bank control, night mode, SQD.
	Diagnosis functions	Warning / fault messages real-time data monitoring.
	Others	Internal measurement, compatibility with power analyzers. Consult Power Electronics for other functionalities.
OTHERS	Web server	For local and remote monitoring / control.
	Customizable solution	Flexible solution based on a powerful modular and programmable controller



Our secret. The key of our success for more than 35 years, our 24/7 after sales service, Power On Support.

Power ON Support

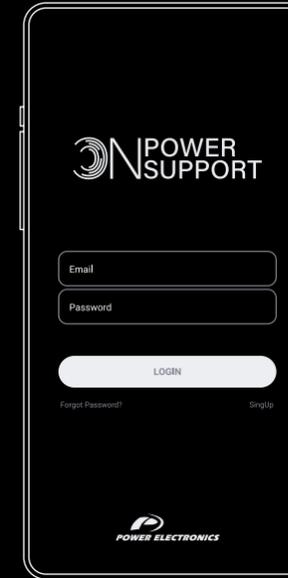

Download Power on Support from any device and get easily all the information about your equipment. Request assistance through the app and our team will be there in less than 48 hrs. Stay updated on your assistance details and check the history of your assistance records.



We take care of the legacy generations.

Each new generation of **inverters** involves adapting the manufacturing lines to optimize the production of these new units. Power Electronics has optimized facilities for the production of previous generation units, where we manufacture ongoing subcomponents adapted to equipment that is no longer in production, allowing an extended life.

Long Term Service. We repair subcomponents or even manufacture equivalent units in our Dedicated Service Factory located near our Production Plant. Power Electronics has experience in repowering old photovoltaic plants, where we supply state-of-the-art equipment adapting its electrical characteristics to be compatible with the existing configuration, while providing all the advantages of the latest generation **inverters**.



We are here
to help you

Vertical Integration throughout the entire process.

The vertical integration is one of our key values. We look after the entire value chain, from design to the on-site commissioning of the products, ensuring the accurate development of all the power electronics inside our **inverters**.

BEFORE COMMISSIONING

- Technical application & design requirement review.
- Dedicated Project Management Support.
- Hands on functional & safety product training.

DURING COMMISSIONING

- Dedicated commissioning teams.
- Rigorous execution through site operation.

AFTER COMMISSIONING

- Support 24/7, 365 days a year.
- Full warranty coverage with options for extension and full preventative maintenance packages.
- Advanced remote monitoring, detailed performance reporting, and interactive portals for tracking metrics directly with Power Electronics.

HEADQUARTERS**SPAIN**

Polígono Industrial Carrases
Ronda del Camp d'Aviació, 4
46160 Llíria, Valencia (Spain)
Cell. (+34) 96 136 65 57
Fax (+34) 96 131 82 01
24/7 Technical Assistance Service
Phone. (+34) 902 40 20 70

UNITED STATES

1510 N. Hobson Street, Gilbert
Arizona, USA
Cell. (+001) 602-354-4890
sales@power-electronics.us
24/7 Technical Assistance Service
Phone. (+001) 902 40 20 70

INTERNATIONAL**ARGENTINA**

Arroyo 894, 5°
Oficina 10, Ciudad autónoma
de Buenos Aires.

ASIA

30th Floor, CATIC Plaza, 8 Causeway
Road, Hong Kong SAR

AUSTRALIA

U6, 30-34 Octal St. Yatala, Brisbane,
Queensland 4118.
(+61) 7 3386 1993
sales@power-electronics.com.au

BEIJING

Xiaoying Road Chaoyang, N°25,
Beijing City.

BRAZIL

Avda. Robert Kennedy 2070. Sao
Bernardo do Campo. Sao Paulo.
(+55) 11 5891 9612 / (+55) 11 5891 9762
brasil@power-electronics.com

CHILE

Av. Alonso de Córdova 5870, Of. 210-211
Las Condes, Santiago de Chile.
(+56) 2 3223 8916
ventaschile@power-electronics.com

COLOMBIA

Cl 77 9-20 Bogotá DC.
(+57) 322 3464855
colombia@power-electronics.com

DOMINICAN REPUBLIC

Ave. John F. Kennedy Núm. 7,
Los Jardines, Distrito Nacional,
Santo Domingo.

FRANCE

51 Rue Hoche, 94200 Ivry Sur Seine, Paris.
+33(0)1 46 46 10 34
ventesfrance@power-electronics.com

GERMANY

Neuseser Strasse 15, Nürnberg.
germany@power-electronics.com

INDIA

Silver Jade, Off. No 03, G.F., A-Wing
CTS NO. -188, Behind Tarun Bharat
Society, Chakala, Andheri East, Mumbai,
Maharashtra
(+91) 80 6569 0489
india@power-electronics.com

IRELAND

20 Harcourt Street, D02 H364, Dublin.

ITALY

Piazzale Cadorna, 6, 20123, Milano.
italy@power-electronics.com

JAPAN

Nishi-Shinbasi 2-17-2 HF Toranomom Bldg
5F. 105-0003 Minato-Ku Tokio.
japan@power-electronics.com

MALAYSIA

Level 7, Menara Milenium, Jalan
Damanlela, Pusat Bandar Damansara,
Damansara Heights, 50490
Kuala Lumpur W.P.
malaysia@power-electronics.com

MEXICO

Henry Ford n.3, Fraccionamiento
Industrial San Nicolás, Tlalnepantla,
Estado de México.
(+52) 1 55 4949 0830 / (+52) 539 08818
mexico@power-electronics.com

NEW ZEALAND

14B Opawa Road, Christchurch 8023.
(+64) 3 379 9826

PERU

Avenida El Polo n° 670, Centro Comercial
El Polo II – Oficina 603, Piso 6°, Bloque C
Santiago de Surco, Lima.
(+51) 979 749 772
ventasperu@power-electronics.com

PHILIPPINES

Unit 209 ZF Page 1 Bldg MBP
Ayala Alabang, Muntinlupa.

SOUTH AFRICA

Central Office Park Unit 5
257 Jean Avenue – Centurion 0157.
southafrica@power-electronics.com

UNITED KINGDOM

Chippenham Drive, Unit 2, Madingley
Court. Kingston, Milton Keynes.
MK10 0BZ.
uksales@power-electronics.com

NOTES

WARRANTY

Power Electronics (the Seller) warrants that their Products are free of faults and defects for a period of 5 years, valid from the date of delivery to the Buyer. It shall be understood that a product is free of faults and defects when its condition and performance is in compliance with its specification.

The warranty shall not extend to any Products whose defects are due to (i) careless or improper use, (ii) failure to observe the Seller's instructions regarding the transport, installation, functioning, maintenance and the storage of the Products, (iii) repairs or modifications made by the Buyer or third party without prior written authorization of the Seller, (iv) negligence during the implementation of authorized repairs or modifications, (v) if serial numbers are modified or illegible, (vi) anomalies caused by, or connected to, the elements coupled directly by the Buyer or by the final customer, (vii) accidents or events that place the Product outside its storage and operational specification, (viii) continued use of the Products after identification of a fault or defect.

The warranty excludes components that must be replaced periodically such as fuses, lamps & air filters or consumable materials subject to normal wear and tear.

The warranty excludes external parts that are not manufactured by the Seller under the brand of Power Electronics.

The Seller undertakes to replace or to repair, himself, at their discretion, any Product or its part that demonstrates a fault or defect, which is in conformance with the aforementioned terms of the warranty. Reasonable costs associated with the disassembly/ assembly, transport and customs of equipment will also be undertaken by the Seller except in cases of approved intervention by the Buyer and/or their representative where cost allocation has been previously agreed.



Power Electronics reserves the right to modify whole or part of the content of this brochure at any time and without prior notice.

